

1/3

FIG. 1

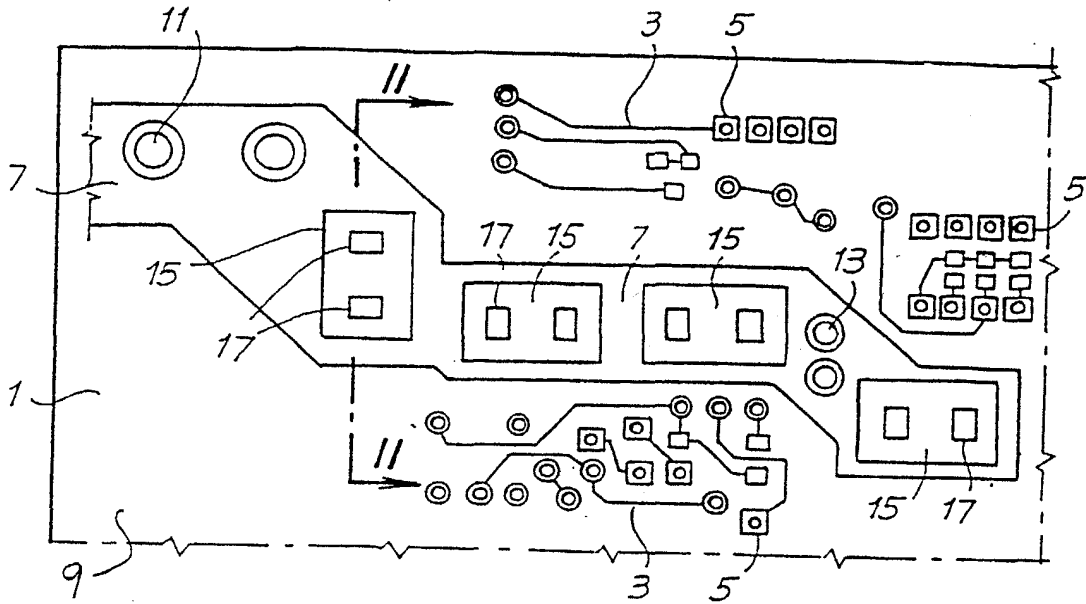


FIG. 2


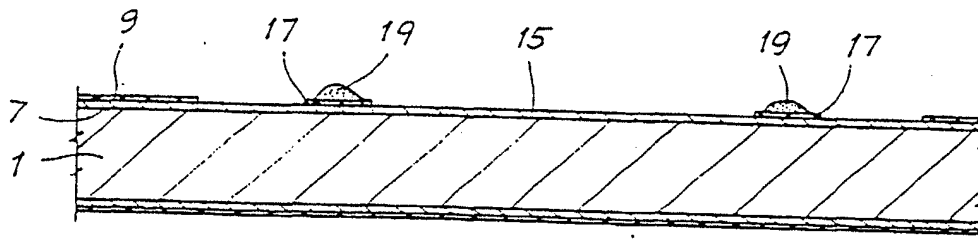


FIG. 3

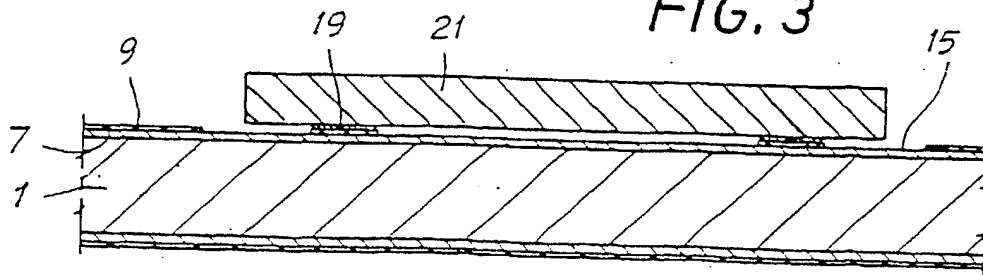

205070 20054001

2/3

FIG. 4

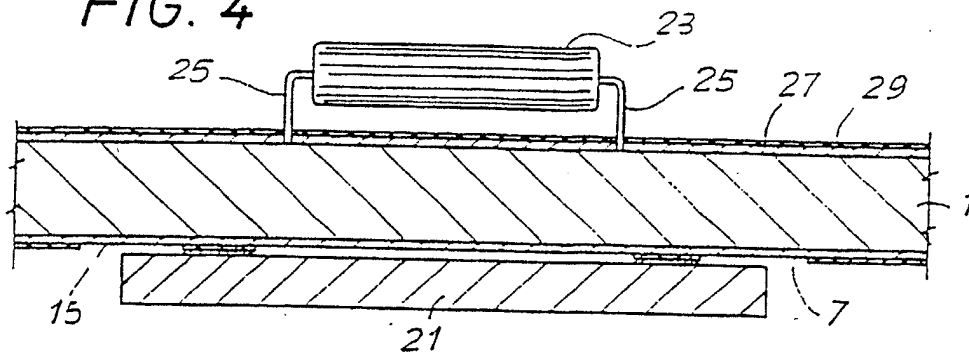


FIG. 5

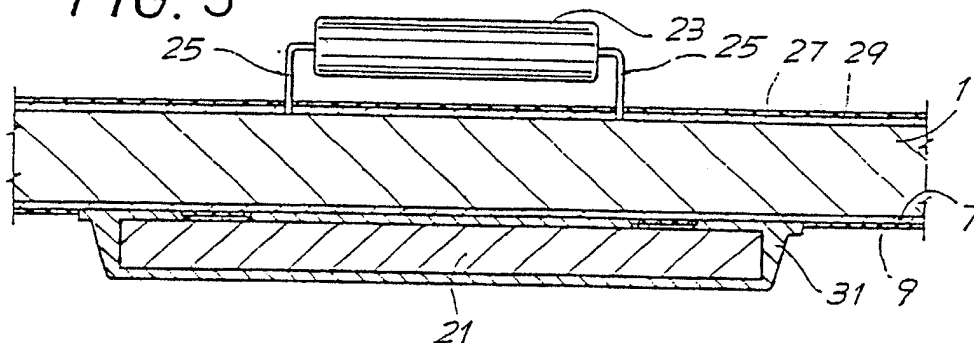


FIG. 7

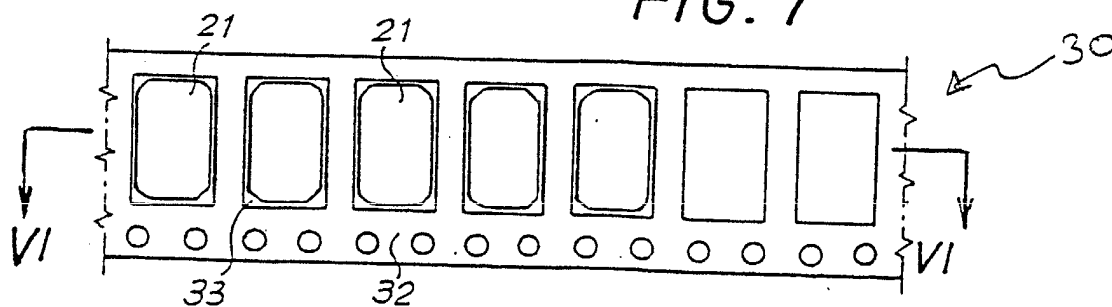


FIG. 6




FIG. 8 is a cross-sectional view of a device. It features a central elongated component (21) with rounded ends (19). This component is mounted on a base (1). The base consists of a top layer (9) and a bottom layer (27, 29). The central component (21) is positioned between the top and bottom layers of the base.

This diagram shows a cross-section of a multi-layered structure. A central block, labeled 19, has a stippled texture and is positioned between two solid blocks, 21 on the left and 9 on the right. These three blocks are situated on a thin layer 27, which is supported by a thicker layer 29. The entire assembly is bounded by a top layer 7 and a bottom layer 1. The layers 27 and 29 are indicated by dashed lines at the far left and right edges of the diagram.